

Gasket Man cc

Data Specifications Sheet

Acryband


Acryband is an acrylic impregnated foam sealant strip

Applications

Suitable for sealing regular and irregular gaps against dust and draughts.
Used by window & door contractors and in log cabins & timber house constructions.
Dust, Dirt and waterproof sealing in motor vehicle manufacturing.
D.I.Y applications.

Advantages

Acryband is economical and easy to use.
Expands within minutes of insertion, evening out irregularities.
Resistance to adverse weather and temperature conditions makes it an ideal sealing medium for most external applications.
Needs no primer and is clean to handle.

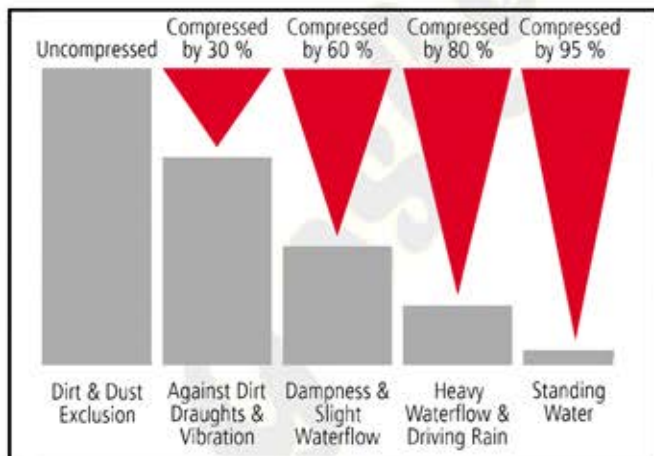

Physical Properties / Technical Data

Composition:

Flexible acrylic resin-impregnated Polyurethane foam.

Colour:

Grey

Size:

Supplied cut to size in various widths and thicknesses or die-cut to your requirements.

Weathering:

Retains elasticity and sealing qualities (If Compressed). Resistant to ageing (If not exposed to direct UV rays for long periods of time).

Temperature Range:

Remains permanently resilient and effective from -20°C to +120°C

Recovery:

Can be compressed by up to 95% of its thickness and returns to original size within minutes of release.

Recovery:

Not sensitive to decay, fungi, weak acids or alkaline solutions. Chemically inert.

Suggested Compressions:

Refer to table on the left.